


## DS-2CE56D5T-IT1 HD1080P WDR EXIR Turret Camera



### Key Features

- 2 Megapixel high-performance CMOS
- Analog HD output, up to 1080P resolution
- True Day/Night
- OSD menu, 3D DNR, Smart IR
- True WDR, up to 120dB
- EXIR technology, up to 20m IR distance
- IP66 weatherproof
- Up the Coax(HIKVISION-C, Pelco-C protocol)

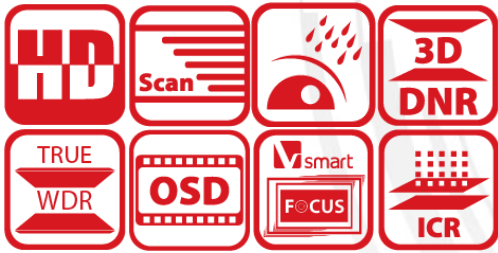


## Specifications

| <b>Camera</b>        |   |
|----------------------|---|
| Image Sensor         | 2MP CMOS Image Sensor   |
| Signal System        | PAL/NTSC  |
| Effective Pixels     | 1944(H)*1092(V)   |
| Min. illumination    | 0.01 Lux @ (F1.2,AGC ON),0 Lux with IR; 0.014 Lux @ (F1.4,AGC ON),0 Lux with IR   |
| Shutter Time         | 1/25(1/30)s to 1/50,000s  |
| Lens                 | 3.6mm (2.8mm, 6mm, 8mm optional)  |
|                      | Angle of View: 82.6°(3.6mm), 103.5°(2.8mm), 54.4°(6mm), 38°(8mm)  |
| Lens Mount           | M12   |
| Day & Night          | ICR   |
| Angle Adjustment     | Pan: 0 - 360°, Tilt: 0 - 75°, Rotation: 0 - 360°  |
| Synchronization      | Internal synchronization  |
| WDR                  | 120dB   |
| Video Frame Rate     | 1080p@25fps/1080p@30fps   |
| HD Video Output      | 1 Analog HD output  |
| CVBS Output          | 1Vp-p Composite Output(75Ω/BNC)   |
| S/N Ratio            | > 62dB  |
| <b>Menu</b>          |   |
| Scene                | Indoor, Outdoor, Indoor1, LOW-LIGHT   |
| Camera ID            | On/off (15 characters, position programmable)   |
| AGC                  | Support   |
| D/N Mode             | Color/BW/EXT  |
| White Balance        | ATW, AWC-SET, Manual  |
| Privacy Mask         | On/Off, maximum 8 zones   |
| Motion Detection     | On/Off, maximum 4 zones   |
| BLC                  | Support   |
| Anti-flicker         | On/Off  |
| Language             | English, Japanese, CHN1, CHN2, Korean, German, French, Italian, Spanish, Polish, Russian, Portuguese, Dutch, Turkish, Hebrew and Arabic |
| Functions            | HSBLC, Digital noise reduction, Digital zoom(62x), Slow shutter, Mirror, Defog, Defect pixel correction, SMART D-ZOOM                   |
| <b>General</b>       |   |
| Operating Conditions | -30 °C – 60 °C (-22 °F – 140 °F), Humidity 90% or less (non-condensing)   |
| Power Supply         | 12V DC ± 15%  |
| Power Consumption    | Max. 4W   |
| Protection Level     | IP66  |
| IR Range             | Up to 20m   |
| Communication        | Up the coax, Protocol: Pelco-C(CVBS output), HIKVISION-C(TVI output)  |
| Dimensions           | Φ114.6 × 89.1mm(Φ4.5" × 3.5")   |
| Weight               | 450 g   |

## Order Models

DS-2CE56D5T-IT1

## Dimensions

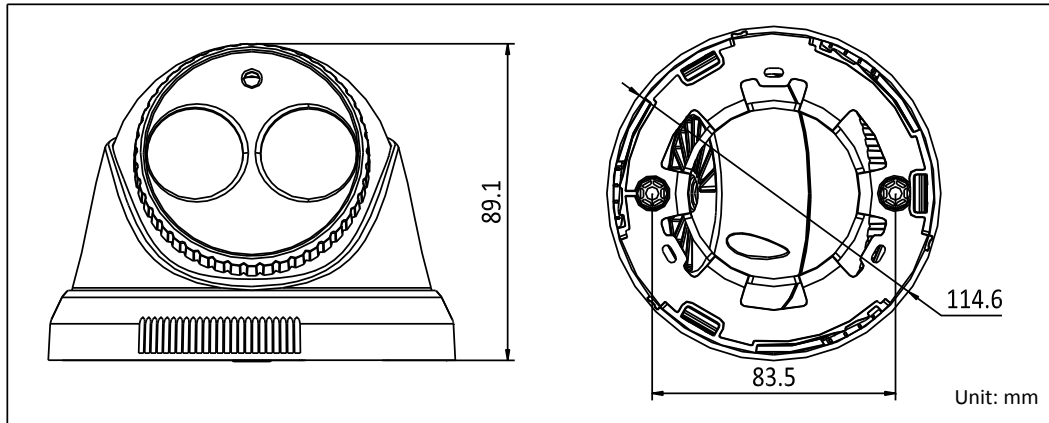

## Accessories



DS-1272ZJ-110  
Wall Mounting



DS-1275ZJ  
Vertical Pole Mounting



DS-1280ZJ-S  
Junction Box



DS-1258ZJ  
Wall Mounting



DS-1281ZJ-S  
Inclined Ceiling Mounting



DS-1H18  
Video Balun



X41T  
Camera Tester



DS-1271ZJ-110  
Pendant mounting

Distributed by



### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

### Hikvision Poland

T +48-22-460-01-50  
poland@hikvision.com

### Hikvision USA

T +1-909-895-0400  
sales.usa@hikvision.com

### Hikvision India

T +91-22-28469900  
sales@pramahikvision.com

### Hikvision UK

T +44-1628-9021-4  
support.uk@hikvision.com

### Hikvision Europe

T +31-23-5542770  
saleseuro@hikvision.com

### Hikvision Italy

T +39-0438-6902  
info.it@hikvision.com

### Hikvision Singapore

T +65-6684-4718  
sg@hikvision.com

### Hikvision Middle East

T +971-4-8816086  
salesme@hikvision.com

### Hikvision France

T +33(0)1-85-330-444  
info.fr@hikvision.com

### Hikvision Oceania

T +61-2-8599-4233  
salesau@hikvision.com

### Hikvision Russia

T +7-495-669-67-99  
saleru@hikvision.com

### Hikvision Spain

T +34-91-737-16-55  
info.es@hikvision.com

### Hikvision Hong Kong

T +852-2151-1761