



SPNPRIPQ30/0922R-A 3 Megapixel IP IR Bullet Camera

3 Megapixel IP IR Bullet Camera Number Plate Recognition Camera











SPRO



Key Features:


- 3 Megapixel progressive CMOS
- H.264
- Max 25fps@3MP or 60fps@2MP video output
- Dual stream support (Stream rate: 20Kb-10M, Default stream rate 4M)
- Multiple network monitoring: Web viewer & CMS(SPRO CSS)
- 9-22mm Auto IRIS Motorized Varifocal IR Lens
- Max IR LEDs Length 20m
- ONVIF
- IP66
- DC12V/PoE

SPECIFICATIONS

Model Number	SPNPRIPQ30/0922R-A
Image Sensor	3 Megapixel progressive scan CMOS
Effective Pixels	2048(H) x 1536(V)
Scanning System	Progressive
Electronic Shutter Speed	1/2.8~1/2000s
Min. Illumination	0 Lux
Video/Audio	
Max. IR LEDs Length	20m
Video Compression	H.264/H.265
Transmission Stream Rate	Dual Stream (Code Rate:20Kb~10M, Default Code Rate:4M)

(continued)

(C			
	Frame Rate	Main Stream	1~25fps (PAL) ,1~30fps (NTSC)
		Sub Stream	1~25fps (PAL) ,1~30fps (NTSC)
	Network		
	Ethernet		RJ45*1 10M/100M
	Wi-Fi		N/A
	Protocol		TCP/IP, UDP, SMTP, PPPoE, DDNS, SNTP, DHCP, FTP, uPnP,RTSP,HTTPS,IPv6
	Network Suppor	t	ONVIF Profile S, SDK, Milestone
_	Max. User Acce	SS	10 users
	Smart Phone		iPhone, iPad & Android
	Memory Slot		N/A
	Web Language		English
	Function		
	Storage		NVR, Software VMS
	Video Type		Manual, Timing, Motion Detection, Alarm Video
_	Alarm Triggers		Motion Detection, alarm
	Alarm Event		Snapshot, Video, Alarm Output, Email Upload, PTZ Drive
	System/Explorer	Support	Windows XP, Windows 7, IE7.0 and above
	General Functio	n	Flashing, True WDR, DWDR、3DNR, Mirror, Watermark Overlay、
			Camera angle
	General		
	Power Supply		DC12V±10% / POE
	Power Consump	otion	770mA(Max)
	Dimensions		231×84×110mm(9.1" ×3.3"×4.3")
	Weight		820g (28.92oz.)
	Storage Temper	ature	-30∼+60℃

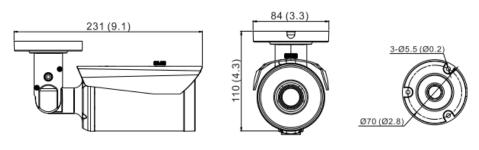

-30∼+45°C

Operating Temperature



All specifications are subject to change without notice. Copyright © Luxrite Ltd. All rights reserved

www.luxritesecurity.com Page 2/2