



Key Features:

- HD CMOS camera
- Large field of view angle
- Night vision
- Voice indication
- Remote intercom with mobile APP
- Surface mounted

SPECIFICATIONS


Model Number	VI-STN01-WIFI	
Main Processor	Embedded Micro Processor	
Operating System	Embedded LINUX OS	
Video		
Video Compression	H.264	
Image Sensor	1/4" 1MP CMOS	
Lens	2.2mm	
Angle of View	D:125° H:105°	
Day/Night	ICR	
Audio		
Audio Compression	G.711	
Audio Input	Omnidirectional Mic	
Audio Output	Built-in Speaker	
Bidirectional Talk	Support Dual-way Bidirectional talk	
	I	45


(continued)

Page 1/3


Operation Mode	
Keypad	Single Mechanical Button
Reader	Contactless ID Card
Interface	
Door Control	2(1 relay out for main lock, 1 extended by access control module)
Alarm In	2(1ch unlock button, 1ch feedback)
RS485	1
Network	
 Wi-Fi	IEEE802.11b/g/n
Ethernet	10M/100Mbps
Network Protocol	TCP/IP
General	
Ingress Protection	IP65
Tamper Switch	1
Memory Slot	N/A
Installation	Surface only
Material	Plastic
Power	DC 12V,PoE(802.3af)
Power Consumption	Standby ≤1W, Work ≤10W
Working Temperature	-30°C~+60°C
Relative Humidity	10%~90%RH
Dimensions	135mm×70.4mm×34.4mm
Weight	0.4Kg


Dimensions

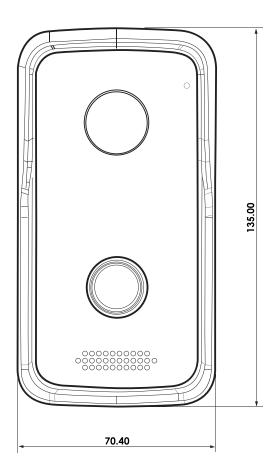



View Area

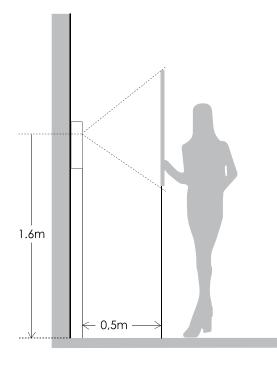

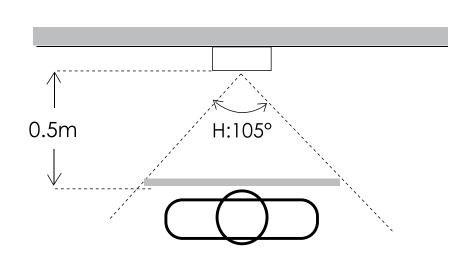



All specifications are subject to change without notice. Copyright @ Luxrite Ltd. All rights reserved

luxritesecurity.com Page 3/3