


iDS-2CD6810F/C (2 mm/2.8 mm) Dual-Lens People Counting Camera



 smart IPC

- 1/3" Progressive Scan CMOS
- Max. resolution 640 × 960
- 2 mm/2.8 mm lens, optional
- 3D digital noise reduction
- DC 12V/PoE
- Dual lens, dual CPU, support stereo views
- Specialized people counting function, support separate counting of people entering, exiting, and passing by
- Flash memory storing people counting data

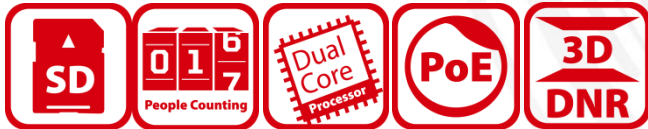

Function Description

Smart

- People counting: support separate counting of people entering, exiting, and passing by
- Smart encoding: Support low bit rate, low latency, ROI enhance encoding

Image

- Max. 640 × 960 @25fps
- Black and white
- Streaming smoothness setting for different requirements of image quality and fluency
- Support H.264 video compression, multi-level video quality configuration; support Baseline Profile/Main Profile H.264 encoding complexity.
- Multiple OSD color: Black & white self-adaptive; Custom

System

- Support ONVIF (profile S/profile G), CGI, PSIA, ISAPI protocol
- Support two video streams, and Support 6 channels live view at the same time
- Lightning protection, surge protection, voltage transient protection, anti-static protection

Interface

- Support standard 128G Micro SD/SDHC/SDXC card storage
- Support RJ45 10M/100M self-adaptive Ethernet port
- Support RS-485 interface
- Support Alarm I/O

Security

- Support three-level user authentication management, user and password authorization
- Support security certificate as HTTPS
- Lock user IP after certain times failed login attempts

Specifications


Camera	
Image Sensor	1/3" Progressive Scan CMOS
Shutter Speed	1/25 s – 1/10,000 s
Lens	2.0 mm, horizontal field of view: 100° 2.8 mm, horizontal field of view: 82°
Lens Mount	M12
Iris	Manual
Digital Noise Reduction	3D DNR
Compression Standard	
Video Compression	Main stream: H.264 Sub stream: H.264
H.264 Type	Baseline Profile/Main Profile
Video Bit Rate	32 Kbps to 8 Mbps
Image	
Max. Resolution	640 × 960
Main Stream Max. Frame Rate	50Hz: 25fps (640 × 480) 60Hz: 24fps (640 × 480)
Sub Stream Max. Frame Rate	50Hz: 25fps (640 × 960) 60Hz: 24fps (640 × 960)
Image Setting	Brightness is adjustable by client software or web browser
Region of Interest	Support 1 fixed region for each stream
Network	
Network Storage	Support micro SD/SDHC/SDXC card (128G), flash memory , ANR
Alarm Trigger	Video tampering, alarm input, alarm output, network disconnected, IP address conflict, illegal login, HDD full, HDD error
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, UDP, Bonjour
General Function	One-key reset, anti-flicker, heartbeat, password protection, privacy mask, watermark
Standard	ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI
Interface	
Communication Interface	1 RJ45 10M/100M self-adaptive Ethernet port, 1 RS-485 interface
Alarm	1 input, 1 output (up to DC 24 V, 1A or AC 110 V, 500mA)
On-board storage	Built-in Micro SD/SDHC/SDXC slot, up to 128 GB
Reset Button	Yes
People Counting	
Statistics	Support separate counting of people entering, exiting, and passing by
Report	Daily, weekly, monthly, and annually report supported
General	
Operating Conditions	-10 °C to + 40 °C (+14 °F to +104 °F), Humidity 10% to 90%, no condensing
Power Supply	DC 12 ± 25%, PoE (802.3af, class 3)
Power Consumption	Max. 7 W
Material	Base: metal; cover: plastic
Dimensions	Camera: 194 × 70.2 × 35.8 mm (7.64" × 2.76" × 1.4")

Weight	271 g (0.6 lb)
--------	----------------

Order Models

iDS-2CD6810F/C (2.0 mm), iDS-2CD6810F/C (2.8 mm)

Dimensions

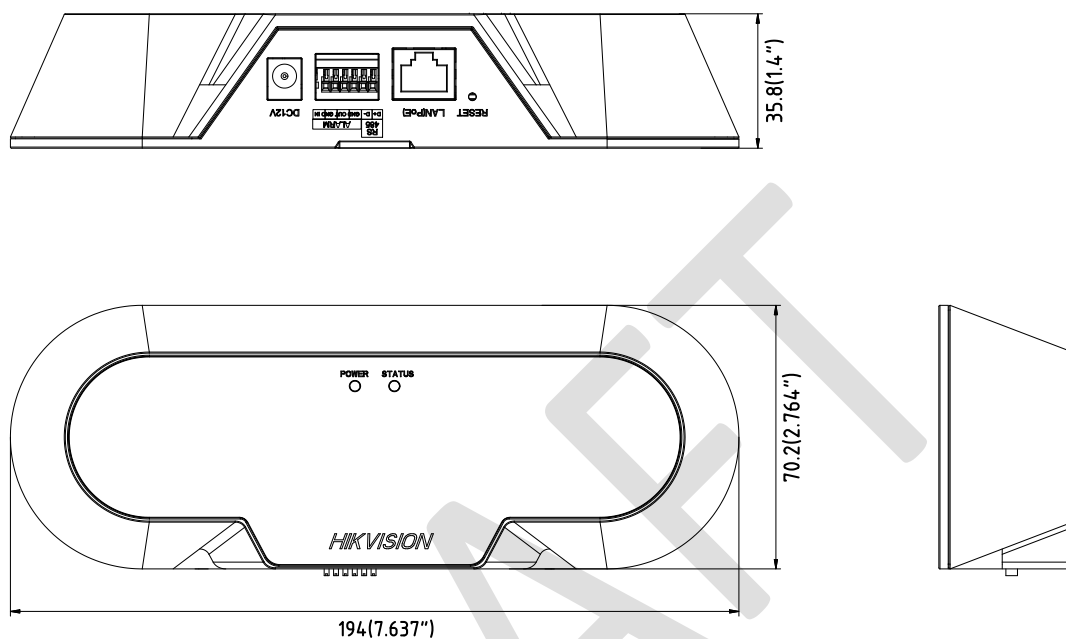

Unit: mm

Installation Recommendation

Following table shows the relations among focal length, mounting height, and max. detection width of typical values. For detailed installation advice, please contact the technical support of HIKVISION.

Focal Length (mm)	Mounting Height (m)	Max. Detection Width (m)
2.0	2.5	1.8
2.0	3.0	2.9
2.0	3.5	4.0
2.8	3.0	2.2
2.8	3.5	3.1
2.8	4.0	4.0

Distributed by



HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Africa
T +27 (0) 0351172
sale.africa@hikvision.com

Hikvision Europe
T +31-23-55-42-770
info.eu@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Hong Kong
T +852-2151-1761

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision Korea
T +82-31-731-8841
sales.korea@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision UK
T +01628-902140
support.uk@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com