

24" LED Monitor

MW3224-V



Features

- True color display and perfect color reproduction
- Wide viewing angle:178°(H)/ 178°(V)
- No color shift from any view angle
- Specific menu design, which is simple to operate
- Support 7*24 working and lower power consumption
- Adaptively recognize signal
- VESA stand bracket
- High fidelity digital processing for a brilliant and vivid video
- Professional thermal design to extend equipment lifespan
- Screen can reduce blue light, protect eyes
- Without ripple, use smooth dimming with DC to eliminate screen flicker
- Three sides super slim design, min width can be 2.8mm
- High light transmittance, uniform brightness, rich color, wide color gamut


Specifications

Model	MW3224-V
Panel	


Backlight	E-LED
Panel Size	24"
Pixel Pitch (H x V) (mm)	0.2745 x 0.2745
Resolution	1920 × 1080
LCD Technology/Panel Type	VA
Color Support	16.7 M
Brightness (cd/m ²)	250
Contrast Ratio	3000:1
Refresh Rate	60 Hz
Response Time (ms)	19
Viewing Angle (H/V)	Horizontal 178°, Vertical 178°
Display Size (mm)	527.04 x 296.46
Operation Hour	24/7
Bezel Width	2.00mm (top/left/right), 20.60mm (bottom)
Color Gamut	72% NTSC
Surface Treatment	Haze 25%, 3H
Interface	
Video Input	1 x VGA, 1 x HDMI
Audio Input	1 x 3.5mm Mini-Jack
Speaker	
Speaker	2 x 1.5 W
VESA	
VESA (mm)	100 x 100
Wall-mounted Thread	4-M4 Threaded Hole, Depth 10mm
OSD	
Multi-Language	8 (English, French, Spanish, German, Russian, Korean, Japanese, Simplified Chinese)
General	
Input Voltage	DC 12 V, 2 A
Typical Power Consumption (W)	≤24 (On)
Standby Power Consumption (W)	≤0.5 (Standby)

Product Dimensions (W x H x D) (mm)	541.8 x 412.6 x 200 (With Pedestal)
Package Dimensions (W x H x D) (mm)	606 x 405 x 125
Weight (Kg)	Net Weight: 3.3 Gross Weight: 4.6
Operating Temperature	0°C ~ 40°C
Operating Humidity	20% ~ 85% (No Condensation)
Storage Temperature	-10°C ~ 50°C
Storage Humidity	10% ~ 90% (No Condensation)
Standard	HDMI Cable, Power Cable, Adapter, Pedestal, Quick Guide
Material	ABS
Lifetime (h)	30000
Certifications	CE/FCC
MTBF	50000h

Dimensions

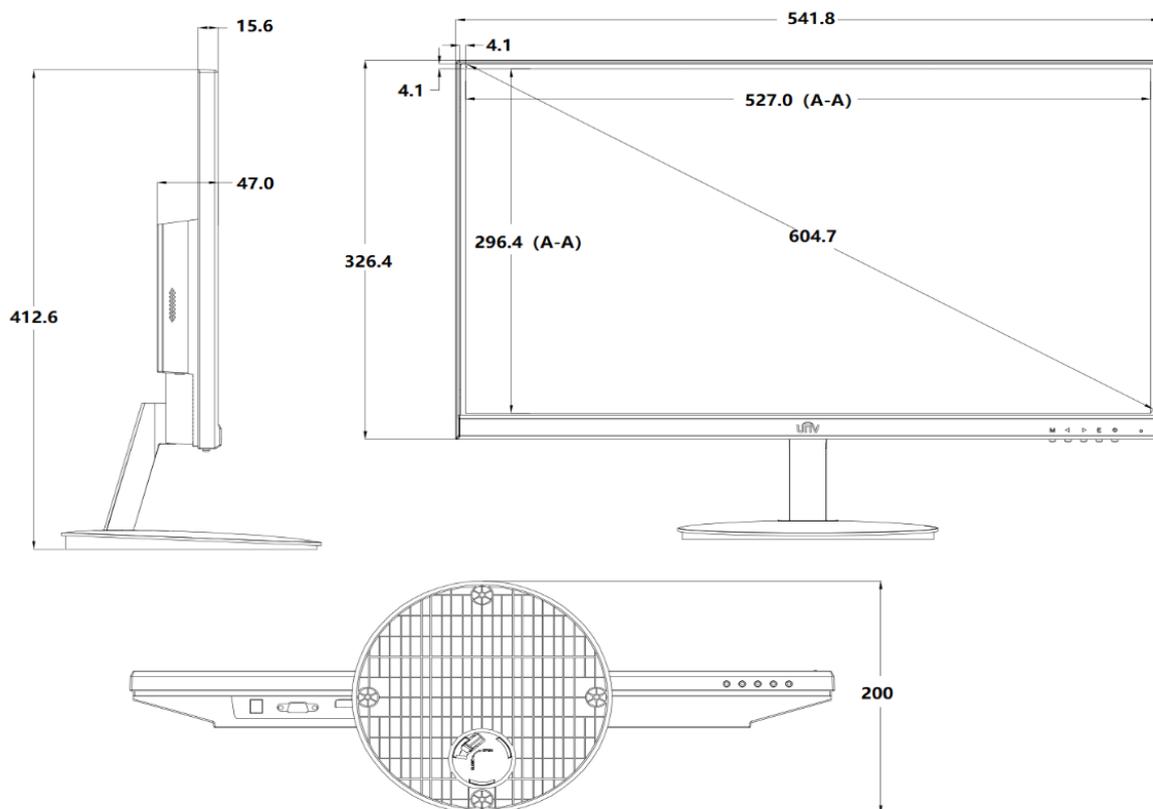

Interface

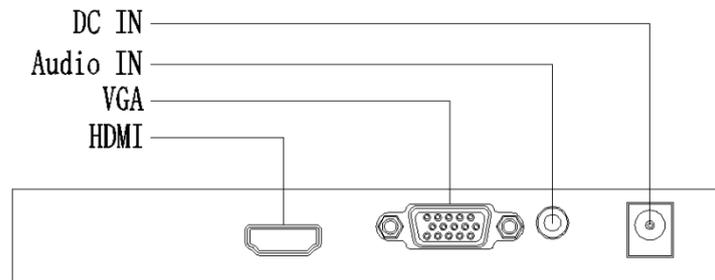

Ordering Info

Product Model	Description
MW3224-V	24" LED Monitor

Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China (Zhejiang) Pilot Free Trade Zone, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.